

The M1 GYS AUTO is a single phase MIG-MAG, with torch connector, recommended for welding steel, stainless steel, aluminium and for MIG brazing of high-tensile strength steels with CuSi and CuAl wires (ideal for car body repairs).

Synergic Mode

The machine determines the optimum wire speed by selecting :

- the type of wire
- the wire diameter
- the welding current



Spool Gun connector

The Spool Gun torch is ideal for car body repairs of aluminium, AISi5 and AISi12.

4 Drive rolls motor

Suitable for ø200mm and ø300mm wire reels (15kg max).

Saving welding parameters

Memory save feature for each torch and activation of the 'last used' welding parameters (wire diameter, wire type & mode).

3 Welding modes available

- Standard (2T)
- Spot
- Delay




Accessories

Delivered with:
- 1 torch 150A - 3m
- 1 earth clamp 200A - 3m
(regulator not included)

Optional Spool Gun (ref.041486)



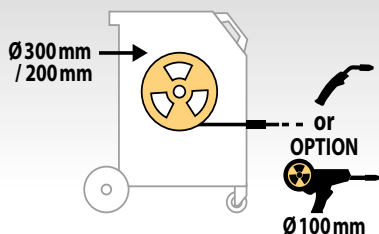


+ PRODUIT



Upgradeable - the M1 GYS AUTO can be fitted with a Spool Gun torch. This motorised torch is suitable for ø100mm wire reels of aluminium, stainless steel, copper and steel in ø0.8mm.

- Ideal for soft wire such as the AISi5 or AISi12 (recommended for car body repairs)
- Ease of use : adjusting the wire speed on the Spool Gun torch directly.

CE - EN 60974-1

50/60hz	AM	min▷max	ø mm	ømm				équipé d'origine / original equipment / Originalausstattung / equipamiento de fabrica		EN60974-1 (40°C)		cm/kg	 Protected & compatible POWER GENERATOR (+/- 15%)	 Spool Gun
				100	200	300		I _A (60%)	X% (I ₂ max)					
230V	16A	15▷160A	0.6-1.0		✓	✓	0.6	0.8	90A	140A 15%	47x77x79 50	4.5 kVA	Option	
208/240V					✓	✓	0.8	0.8						