

Automatic air powered riveter specially designed to perform common riveting tasks in modern bodyshops including self-piercing rivets and standard flow form rivets.

ACCURATE SETTINGS


The user can manually adjust the **actuator speed** as well as **rivet pressure** according to the metal used in order to avoid panel distortion.



Speed control



Pressure control
0 > 95 Psi

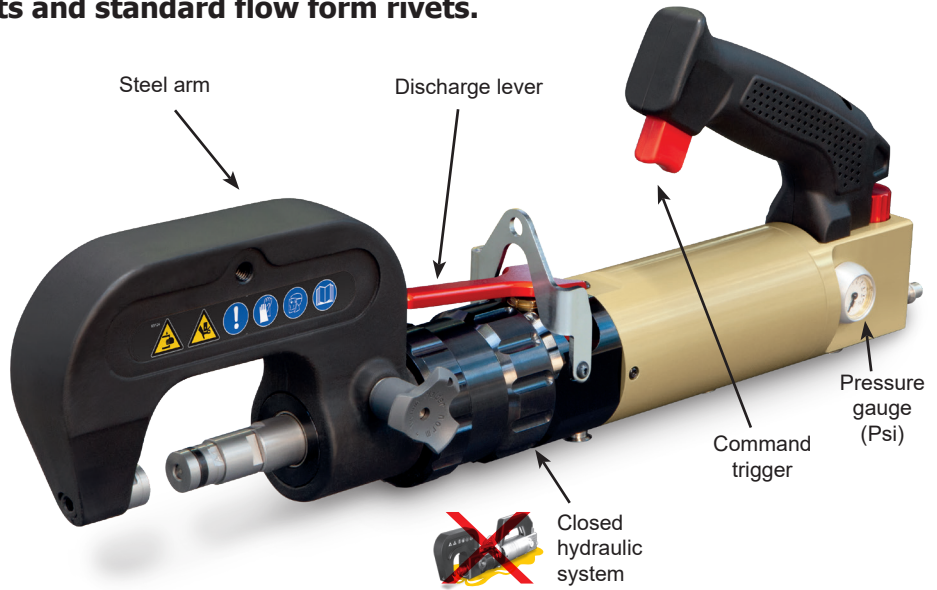

ERGONOMIC AND EFFICIENT

- Maximum pressure of **10 tonnes** with integrated pressure gauge (Psi).
- **Fast and easy** arm change.
- C-arm **swivels 360°** around the riveting machine axle.
- Selection of arms available for **difficult access situations**.
- Easy to use **ergonomic handle and trigger**.
- **Magnetic die** makes rivet positioning easy.

Delivered with :

- 2 die keys
- 1 strap
- 1 arm HR110
- 1 handle for arm
- 1 box of rivets





- + 1 standard die kit for extraction and rivet positioning
- + Centre punch :
 - self-piercing (ø 3.3 et 5.3 mm)
 - flow-form (ø 5.6 mm)



ACCESSORIES





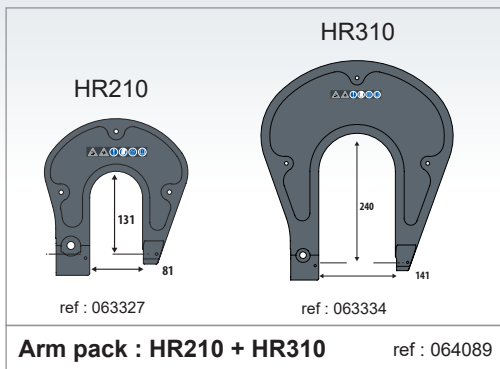




HR110 arm
ref : 063310



Support
ref : 054158



GYSPRESS 8T
Workstation
ref : 054233

							Cycle time	AIR Psi
39.5 x 180 cm	58 x 48 x 15 cm	11.8 kg	4 kg	3 kg	5.4 kg	12 kg	4 sec	normal 95 maxi 110